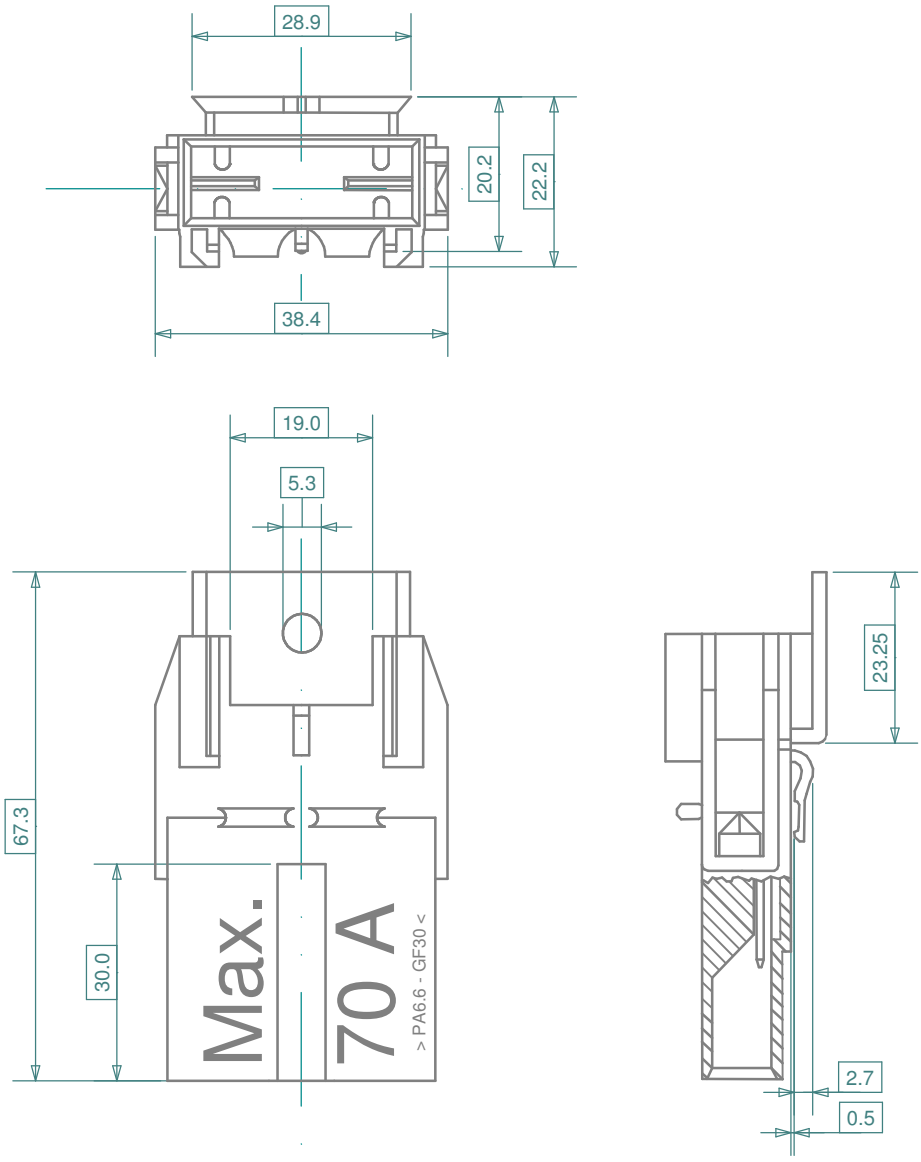

Rating [A]	Cable min. cross section
20	1.5
30	2.5
40	4.0
50	6.0
60	10.0
70	10.0

Notes:

Body material PA 6.6 GF30 (UL94-HB)
Tab contact CuFe 2 PH 130 (K65), DIN 17 670

Recommended cable contact: 9.5mm female receptacle (DIN 46340 T4)

Revisions						
	Date	Type	Drawn	01/03	AdH	
a	06/08	re-drawn	Checked			
			Standards			
			Approved	06/08	AdH	
			Scale	not to scale	Title	H9110 series, maxiOTO blade fuse holder
			Projection	Tolerance ± 0.2 mm unless otherwise noted	Drawing type	schematic
					Drawing number	H9110 drawing 1
					Sheet	1 of 1
					Layers / Sheet	0 1 2 3 4 5 6 7 8 9 10 11 Sheet 01