

1

2

3

4

A


A

10.65 +0/-0.1





19.0

12.1 ± 0.1

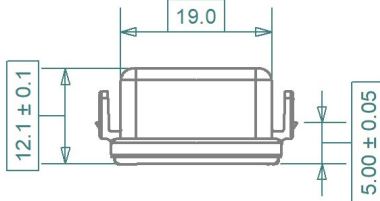

5.00 ± 0.05

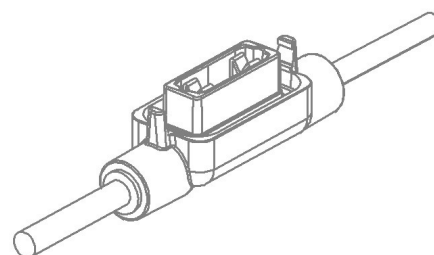

3D not to scale



B

B



C

C

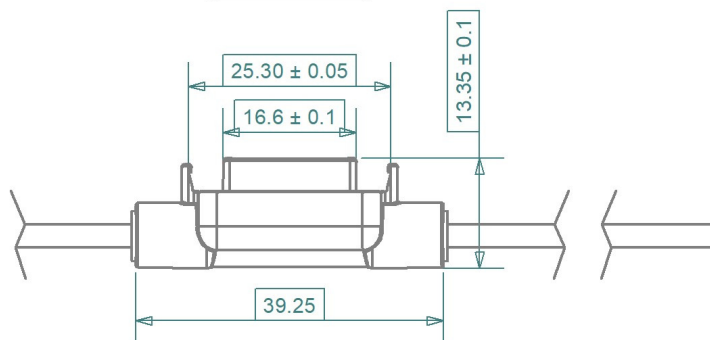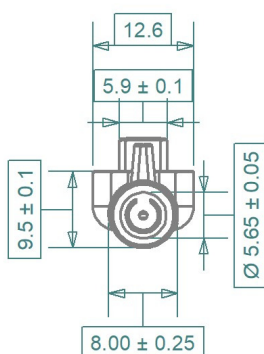

D

D

iMaXX Reference	Description
HLP7325	FH pre assembled, miniOTO Low Profile fuse, 1.5mm ² black wire 135 mm each side (±5mm)
HLP7335	FH pre assembled, miniOTO Low Profile fuse, 2.5mm ² black wire 135 mm each side (±5mm)

Note: HLP7335 max. load 65% with > 120s duration applications

FLP7000 series miniOTO Low Profile blade fuse ref. table:

Rating [A]	Color	Volt [V]	iMaXX Reference
2	Gray	58	FLP7002
3	Violet	58	FLP7003
4	Pink	58	FLP7004
5	Tan	58	FLP7005
7.5	Brown	58	FLP7075
10	Red	58	FLP7010
15	Blue	58	FLP7015
20	Yellow	58	FLP7020
25	Natural	58	FLP7025
30	Green	58	FLP7030

E

E

Revisions		Date	Appr.
Date	Type	Drawn	08/11 GRH
		Checked	06/13 BE
		Standards	
		Approved	06/13 AdH
		Scale	Not to scale
		Projection	Tolerance ± 0.2 mm unless otherwise noted
		Title	HLP7300 series, FLP fuse holder
		Drawing type	schematic
		Drawing number	HLP7300 drawing 2
		Sheet	1 of 1
		Layers / Sheet	0 1 2 6 9 11 Sheet 01



F

F

1

2

3

4