



Bussbar configuration (top view)

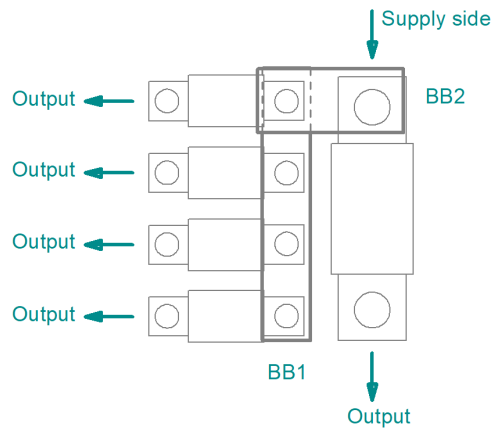

Note: BB2 can be placed on other side of megaOTO fuse, also switching supply and output

Additional information:
 Bussbar dimensions: BB1 1.5x12x67mm, BB2 1.80x15x33.5mm (WxHxL)
 Bussbar dimension tolerance: W: ± 0.3mm, H: ± 0.5mm, L: ± 1.0mm
 Bussbar material: Copper, Cu
 Max fuse rating: 4 x 200A midiOTO, megaOTO not limited
 Torque range: midiOTO (M5) 2 - 3 Nm, megaOTO (M8) 7 - 9 Nm

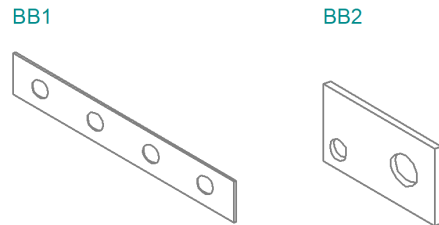

Revisions			Date	Appr.
	Date	Type	Drawn	04/09 GRH
a	06/10	added cable hole dimensions	Checked	02/20 AdH
b	02/11	updated dimensions	Standards	
c	07/11	added bussbar tolerances	Approved	02/20 BE
d	03/18	updated dimensions		
e	02/20	production start new tool	Scale	1 : 2
			Projection	Tolerance ± 1 mm unless otherwise noted



Title	HMD4-MG1, holder midiOTO, megaOTO
Drawing type	schematic
Drawing number	HMD4-MG1 drawing 1
Sheet	1 of 1
Layers / Sheet	0 1 2 3 6 8 9 11 Sheet 01